

RFS Series Datasheet

Coated Power Wirewound Fusing Resistors | Axial

ORDERING CODE-Example

New SAP Part Nr.:

RFS	230	J	T	-	52-	47R	AA
Series	* Power rating	Tol.	Pack-Code	TCR	Forming type	R Value	Special
	110 = 1,1W 230 = 2,3W 340 = 3,4W 500 = 5,0W	F = ±1% J = ±5%	T = Tape (ammo pack)	- Base on spec.	52- Inner Taping dimension or 73- Inner Taping dimension		AA = Standard

Historical VTM Part Nr.:

RF0512	2W	5	T	47R
Type	Power rating	Tol.	Pack-Code	R Value

APPLICATIONS

- Alternative Energy
- Power Supply
- Home Appliances
- Industrial


FEATURES

- Low-cost fusible type
- UL-94V-0 Flameproof
- RoHs and REACH Compliant

ELECTRICAL SPECIFICATIONS

Type		RFS110	RFS230	RFS340	RFS500
Historical Part Number		RF0410	RF0512	RF0613	RF0718
Nominal Power Rating	* P ₄₀	1,1	2,3	3,4	5,0
	P ₇₀	1,0	2,0	3,0	4,4
Resistance Range	[Ω]	R47 ... 62R	R47 ... 150R	R47 ... 240R	R56 ... 330R
E-Series (preferred)		E12 (Other upon request)			
Tolerances	±[%]	1 = F ; 5 = J			
Temperature Coefficient	±[10 ⁻⁶ K ⁻¹]	350			
Working Temperature Range	[°C]	-40 ... +155			
Thermal Resistance	[KW ⁻¹]	85	43	29	23
Insulation Resistance IEC60115-1 clause 4.6	[MΩ]	> 10 ⁴			
Max. Working Voltage	[V] _{RMS}	$\sqrt{P_{70} \times R}$			
Dielectric Withstanding Voltage IEC115-1 clause 4.7 (1[min])	[V] _{RMS}	300			
Flameproof multi-layer coating meets		UL-94V-0			
Flameproof feature meets overload test		UL-1412			

DIMENSIONS [mm]

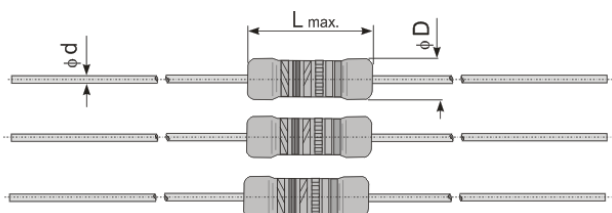


Type	Historical P/N:	L max.	∅ D max.	∅ d ±0,05
RFS110	RF0410	10,0	3,9	0,55
RFS230	RF0512	12,5	5,0	0,80
RFS340	RF0613	13,0	5,5	0,80
RFS500	RF0718	18,5	7,0	0,80

RFS Series Datasheet

PERFORMANCE DATE

Type		RFS110	RFS230	RFS340	RFS500
Historical Part Number		RF0410	RF0512	RF0613	RF0718
Derating Linear	[°C]	70...275 (0W)			
Climatic Category		55/155/56			
Endurance <i>IEC60115-1 clause 4.25</i> <i>(P₇₀ @ 70°C, 1000[h]) 1,5h ON; 0,5h OFF</i>	±[%]	5,0			
Damp Heat, Steady State <i>IEC60115-1 clause 4.24</i> <i>(40^{±2}°C, 93[% r.h.], 56[d])</i>	±[%]	5,0			
Short Time Overload <i>IEC60115-1 clause 4.13</i> <i>(U=10 * √P₇₀ * t̄ 5[s])</i>	±[%]	2,0			
Resistance to Soldering Heat <i>IEC60115-1 clause 4.18</i> <i>(260°C, 10[s])</i>	±[%]	1,0			
Resistance to solvents of Marking <i>IEC60115-1 clause 4.30</i> <i>(5^{±0,5}[min])</i>		No deterioration of coating and marking			
Robustness of Terminations <i>IEC60115-1 clause 4.16</i> <i>(≥2,5[kg], 10[s])</i>	[N]	24,5			
Solderability <i>IEC60068-2-20</i> <i>(235^{±5}[°C] 3^{±0,5}[s])</i>		Solder bath method (> 95% coverage)			
Marking <i>IEC60062</i>		Color code (5th band (blue) for failsafe version)			

DERATING CURVE

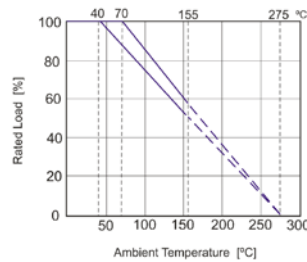


FUSING PERFORMANCE

Type	Historical P/N:	Fusing Characteristics:		
		Resistance range	Times of rated power	Fusing Time max.[s]
RFS110...RFS500	RF0410,RF0512,RF0613,RF0718	≤ 2.0 Ω	36	60
		>2.0 Ω	25	60

Fusing residual resistive value at least 100 times rated resistance

PACKAGING

The standard packaging for RFS in axial type is taped, dimensions below.

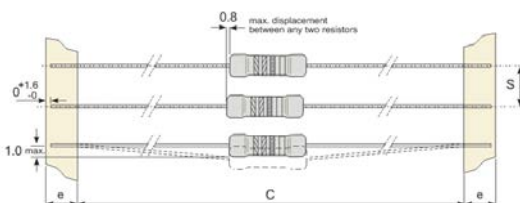

Type	Historical P/N:	Pack Code	Pieces	Forming Type (Inner Taping dim.)	C	e	S
RFS110	RF0410	T = Taped Ammo pack	1000	52-	52,4	6	5
RFS230	RF0512		1000		52,4	6	5
RFS340	RF0613		1000	73-	73,0	6	10
RFS500	RF0718		250		73,0	6	10