

Zero-Ohm, moulded Jumper




**ELECTRICAL SPECIFICATIONS**

|  |                    |              |
|--|--------------------|--------------|
| Type   | <b>ZOM100-902</b>  |              |
| Style  | 0207               |              |
| Current rating   | [A]                | 10           |
| Resistance range   | [Ω]                | 0R           |
| Temperature range  | [°C]               | -55 ... +175 |
| Dielectric withstanding voltage<br>IEC115-1 clause 4.7 (1[ <i>min</i> ]) | [V] <sub>RMS</sub> | 1000         |

**PERFORMANCE DATA**

|                                 |                         |      |
|---------------------------------|-------------------------|------|
| Cross-section area of conductor | [mm <sup>2</sup> ]      | 0,33 |
| Conductor resistance            | [mΩ/cm]                 | 0,54 |
| Marking                         | one colour-band : black |      |


**DIMENSIONS [mm]**

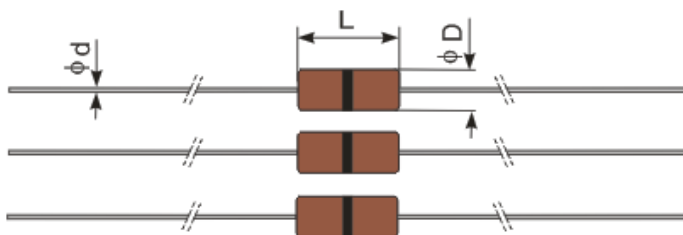

| Type    | L ±0,2 | Ø D ±0,2 | Ø d ±0,02 |
|---------|--------|----------|-----------|
| ZOM0207 | 6,4    | 2,3      | 0,65      |

**PACKAGING**

The standard packaging for ZOM type is taped, dimensions below

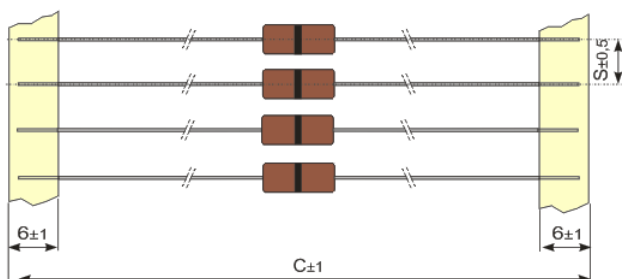

| Type    | Packaging         | Pieces | Pack. Code | C  | S |
|---------|-------------------|--------|------------|----|---|
| ZOM0207 | Taped<br>Ammopack | 2000   | T          | 65 | 5 |
|         | Taped / Reel      | 5000   | R          |    |   |

**ORDERING EXAMPLE**

|                |           |           |
|----------------|-----------|-----------|
| <b>ZOM0207</b> | <b>T</b>  | <b>0R</b> |
| Type           | Pack-Code | R-Value   |